BAYSTAR

BAYSTAR OUTBOARD

APPLICATIONS

BayStar Compact system designed to fit even the narrowest of splashwells. For outboard boats under 150hp total.

FEATURES

- Patented No FeedBack™
 Steering lock valves
- 5 turns lock-to-lock
- Up to 150 horsepower (total)
- Available either as separate components or as a complete system ready to install
- Fixed cylinder
- BayStar hydraulic tubing cut to suit application
- Tilt option available
- Requires 3" (76mm) cut-out hole in dash
- Requires 21" (534mm)
 splashwell width



BayStar provides hydraulic steering performance for the lower horse power range.

For outboard engine applications over 150 hp, choose one of the Seastar® family of products.

Tilt option available

ORDER INFORMATION

ORDER INFORMATION	PART No.
BayStar Compact Kit (Cylinder, helm, tube and oil)	HK4200A
BayStar Compact cylinder	HC4645H
BayStar 1.4 Front Mount Helm	HH4314
BayStar 1.4 Sport Tilt Helm	HH4315
BayStar Compact kit with 30ft tubing	HK4230A
BayStar Mounting kit	HA5476

PARTS AND ACCESSORIES	PART No.
Cylinder : Seal Kit	HP4600
Hose / Bleeder Fitting	HF4202
Support Rod	HP6050
Helm : Seal Kit	HP6032

NOTICE: BayStar is not recommended for use in the following applications;

- Pontoon Boats
- High Speed Single Engine Boats, Such As Flats, Bass Or Race/Ski Combonations
- High Performance 150 Hp Engines

Issue Date - June 2015 Issue Number - hos1









BAYSTAR OUTBOARD


Will it fit?

Is there enough room in the splashwell for full engine tilt? Find the dimensions (A, B & C) of your splashwell. Check them against the minimum splashwell dimensions for full engine tilt for your engine and cylinder


Notes:

- a. Ensure there is no interference between the BayStar cylinder rod (star board side) and the splashwell boot or engine controls & cables.
- b. Dimensional restrictions also apply to external motor mount brackets.
- c. Ensure dimension 'A' maintains 21" (813mm) through full trim/tilt range.
- d. Maximum transom thickness 3" (76mm).
- e. Engines less than 70HP may require up to an additional 1" (25mm) of splashwell clearance.

TECHNICAL DATA



NO OF ENGINES	А	В		MIN ENGINE CENTER DISTANCE
1	21" (534mm)	6" (153mm)	5" (127mm)	N/A

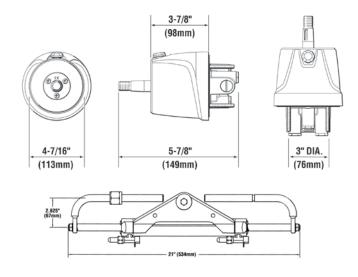

Issue Date - June 2015 Issue Number - hos1





