


FEATURES

- Flexible cable allows for adjustable locations of kicker motor.
- Allows independent trim/tilt of both engines.
- Allows full steering stroke of both engines.
- Simplified installation using universal ABYC steering connection (as per ABYC P17 & P21 standards) on kicker motor.
- Retrofittable to SeaStar Front Mount Cylinders
- Incorporates unique patented **xtreme** cable technology

Installation Notes:

- Kicker Cable Tie Bar systems require a minimum clearance of 14" from the end of the tilt tube towards the motor side well or gunnel.
- Includes universal bracket for port or starboard mounted kicker

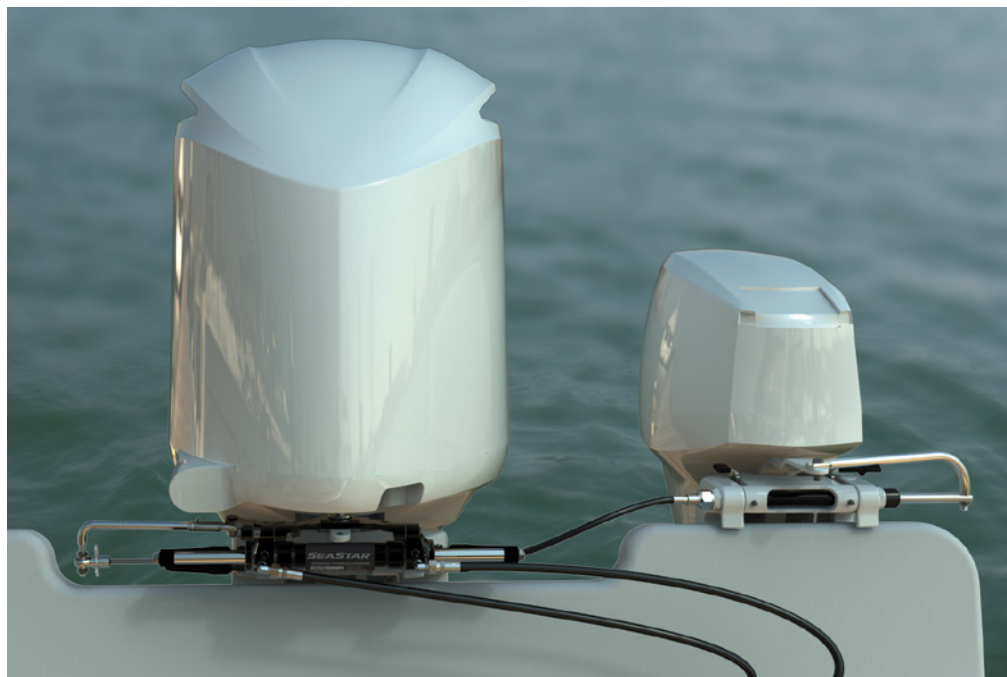

This new SeaStar product allows a user to manually steer an auxiliary engine (kicker motor) using their existing SeaStar hydraulic steering system. Today this is accomplished with a variety of solid mechanical linkages between the main engine and the auxiliary engine. SeaStar Solutions has developed a patent pending design that incorporates a cable as the linkage between the two engines.

NOTE: NOT for use with BayStar steering systems. The Kicker Cable Tiebar will ONLY work with SeaStar HC5345, HC5358 and HC5348 steering cylinders.



ORDER INFORMATION

PART No.	MAX ENGINE HORSEPOWER	CABLE LENGTH (NOMINAL)	CABLE TYPE
HO6116	20HP	16 inches	xtreme 40 series
HO6122	20HP	22 inches	xtreme 40 series
HO6128	20HP	28 inches	xtreme 40 series
HO6134	20HP	34 inches	xtreme 40 series
HO6144	20HP	44 inches	xtreme 40 series

Issue Date - May 2014

Issue Number - hos2



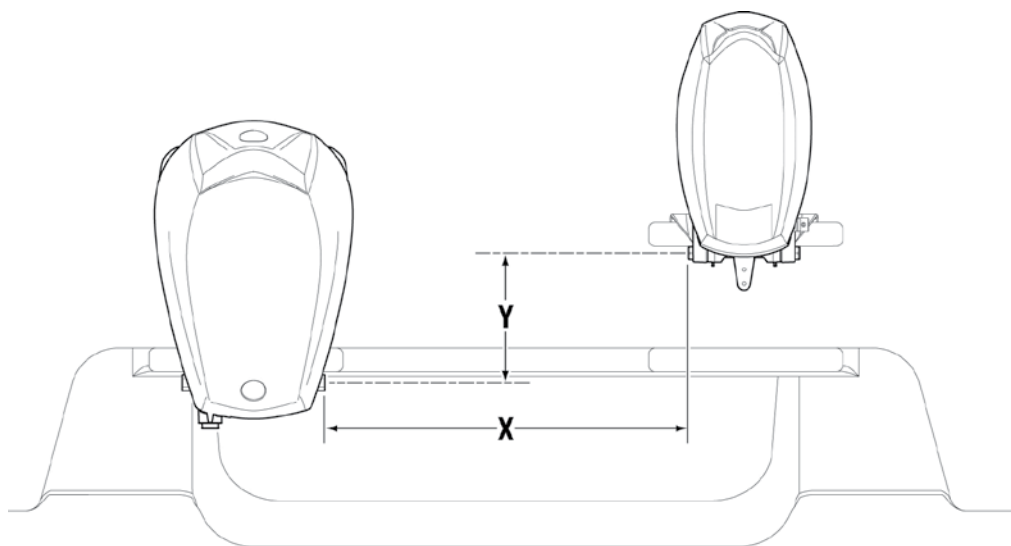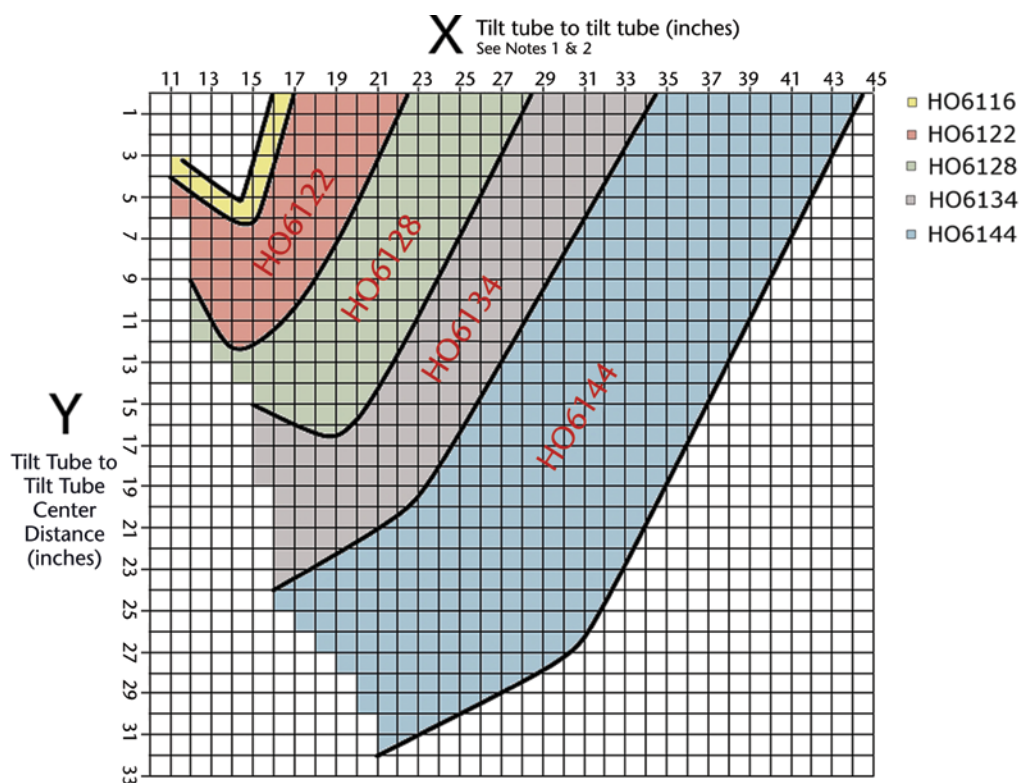

SEASTAR
SOLUTIONS®



www.seastarsolutions.com



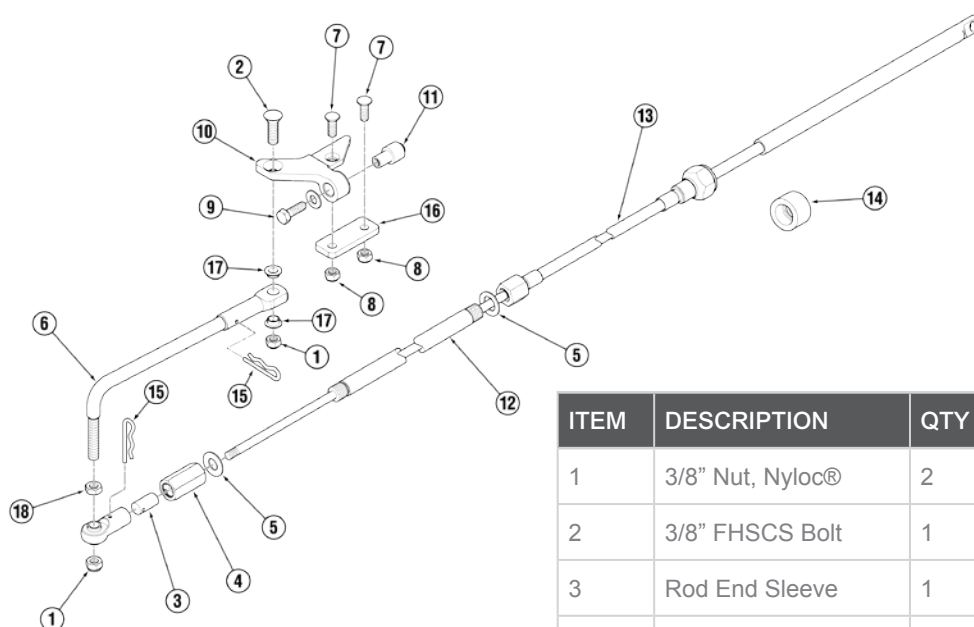
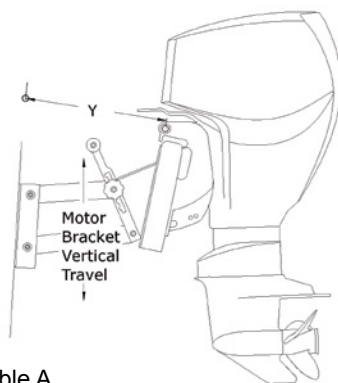
KIT CONTENTS**KICKER CABLE TIE BAR
SELECTION WITH MOTOR
BRACKET**

Table A

MOTOR BRACKET VERTICAL TRAVEL	ADD TO X DIMENSION
10"-12"	X + 3"
13"	X + 4"
14"-15"	X + 5"
16"-20"	X + 6"

ITEM	DESCRIPTION	QTY
1	3/8" Nut, Nyloc®	2
2	3/8" FHSCS Bolt	1
3	Rod End Sleeve	1
4	Long Nut Assembly	1
5	Washer	2
6	Link Arm Assembly	1
7	FHSCS 5/16" Bolt	2
8	5/16" Nut	2
9	HHCS 5/16" Bolt	1
10	Drive Bracket	1
11	Spacer	1
12	Support Rod	1
13	Cable	1
14	Cap Seal	1
15	Connecting Clip	2
16	Drive Plate	1
17	Brass Bushing	2
18	3/8" Nut	1

Note 1.

For a Kicker installed on a motor bracket with vertical travel, add additional length to X dimension (as per table A).

Note 2.

For Main engine installed on an adjustable Jackplate add an additional 2" to X dimension.

Issue Date - May 2014

Issue Number - hos2

