



NEW STYLE CLASSIC TILT HELM PUMP

Teleflex Marine would like to advise customers of the launch of the **Classic** Tilt Helm; a newly styled tilt helm offered with SeaStar and SeaStar PRO helms. The **Classic** Tilt Helm contains the previously redesigned, pre-loaded tapered bearing tilt mechanism. The new look will enhance dashboard appearance while the tilt mechanism will improve performance.

The new **Classic** Tilt Helm is available now with SeaStar and SeaStar PRO helm pumps. The older Traditional Style Tilt Helm will remain available until May 29, 2009.



Figure A.

NOTICE

Classic Tilt helms have a total tilt range of 48°, with 5 positions spaced in 12° increments. The 1st position is 18° from horizontal.

Prior to installation, ensure that the complete range of tilt will not lead to interference with the dashboard or any other functional equipment.

| PART# | DISP. | RELIEF SETTING | SHAFT SIZE | REPLACES TILT PART# |
|--------|------------|----------------|--------------|---------------------|
| HH6541 | 1.7 cu.in. | 1000 psi | 3/4" tapered | HH5741 |
| HH6542 | 2.4 cu.in. | 1000 psi | 3/4" tapered | HH5742 |
| HH6543 | 2.0 cu.in. | 1000 psi | 3/4" tapered | HH5743 |
| HH6544 | 1.4 cu.in. | 1000 psi | 3/4" tapered | HH5744 |
| HH6573 | 1.7 cu.in. | 1500 psi* PRO | 3/4" tapered | HH5773 |
| HH6574 | 2.0 cu.in. | 1500 psi* PRO | 3/4" tapered | HH5774 |
| HH6575 | 1.4 cu.in. | 1500 psi* PRO | 3/4" tapered | HH5775 |
| HH6241 | 1.7 cu.in. | 1000 psi | Spline | HH5941 |

* ALL PRO helms (1500psi) must be used with SeaStar PRO hoses and in a SeaStar PRO application ONLY. DO NOT use an un-balanced cylinder with any PRO helm pump.

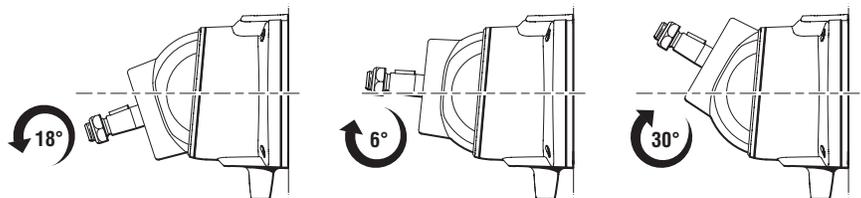


Figure B.