



POWER STEERING CYLINDER UPDATE



Teleflex Marine would like to advise our customers of a change to ALL SeaStar Power Steering Cylinders. In the past, the hose fittings on the steering cylinder servo valve marked with PRS and TNK have been pre-installed. These fittings will no longer be pre-installed at the factory and will come packaged in a separate bag with the cylinder. This change is being implemented to assist with the installation of the new DC Power System.

The **DC Power System** is an exciting new product from Teleflex Marine. DC Power will remove the external pump, reservoir, oil filter and cooler from the current power steering systems. DC Power greatly reduces labor time and troubleshooting while offering a much more responsive feel to boats that are currently using Power Steering Systems with external parts.

For more information please visit our website: www.teleflexmarine.com

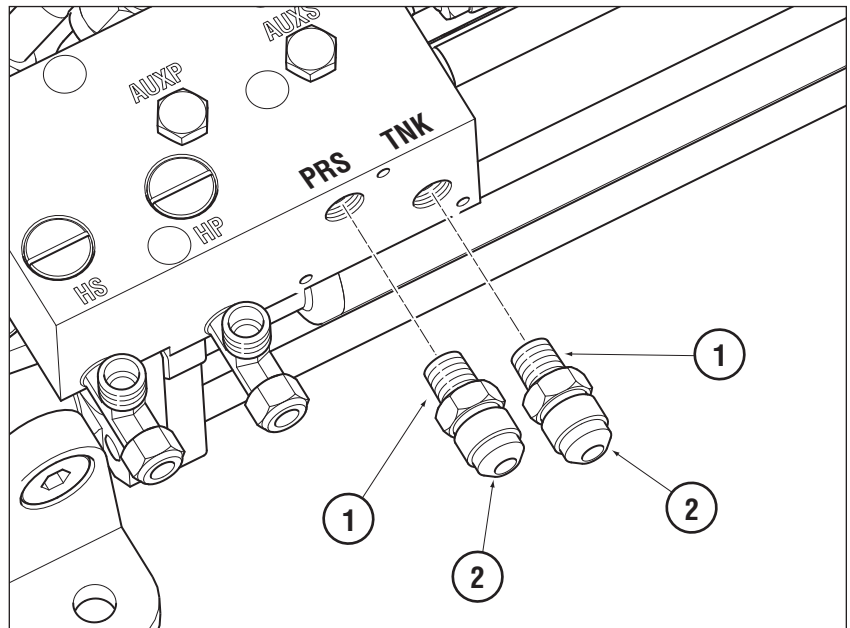


Figure A

Fitting Installation Instructions

1. Apply a liquid, Teflon based pipe sealant to the threads of the fitting going into the Servo Valve Block. **DO NOT USE TEFLON TAPE.**
2. Install fitting into port and torque to 19 ft.lb. (25.76Nm).