



SEASTAR  
SOLUTIONS®

# INSTALLATION MANUAL

Manual # 055000-344

Rev 1

05/2013

Page 1 of 1

INSTALLER: THESE INSTRUCTIONS CONTAIN IMPORTANT SAFETY INFORMATION AND MUST BE FORWARDED TO THE BOAT OWNER.

## Adjustable Cable Brake

Part Number: 044386

For use with 30, 40 and 60 Series Push-Pull Cables

**PLEASE READ THESE INSTRUCTIONS THROUGH CAREFULLY AND ENTIRELY BEFORE BEGINNING INSTALLATION!**

The adjustable cable brake is designed to introduce friction into the push-pull cable system. This permits a constant control setting which might otherwise creep due to governor back pressure, vibration, etc.

### Installation

1. Choose an accessible spot on the cable, near the control head. The brake is considerably more effective when placed at the control head end of the cable, and gives better operator feel.
2. Assemble the brake on the cable.
3. Adjust the brake in small increments until the desired friction is attained.

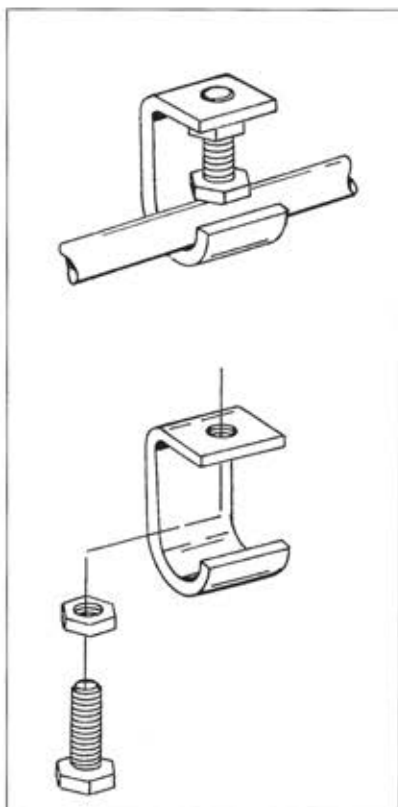


FIGURE 1 - 30 SERIES



**WARNING:**  
APPLY ONLY ENOUGH PRESSURE TO PREVENT CABLE FROM CREEPING WHEN IN OPERATION. OVER-TIGHTENING WILL RESULT IN EXCESSIVE LOAD AT THE CONTROL AND POSSIBLE DAMAGE TO CABLE.

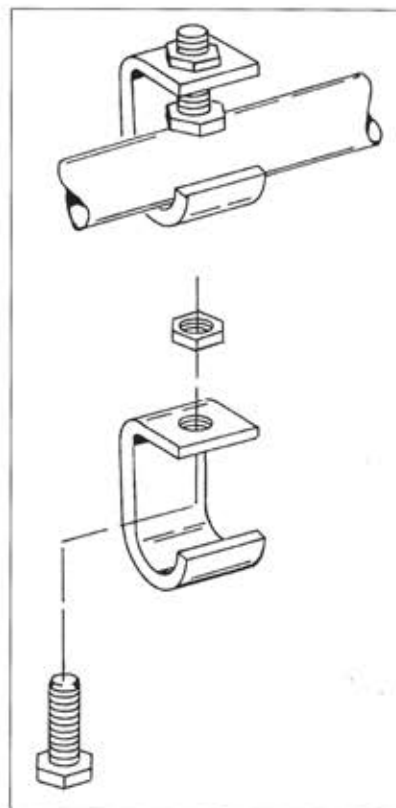


FIGURE 2 - 40 & 60 SERIES

USA Sales/Support  
SeaStar Solutions  
640 North Lewis Road  
Limerick, PA 19468  
610-495-7011  
[www.seastarsolutions.com](http://www.seastarsolutions.com)

Overseas Sales/Support  
SeaStar Solutions  
International Sales and  
Marketing  
Tel: +44 1202 828010  
[www.seastarsolutions.com](http://www.seastarsolutions.com)