

Electronic Power Steering (EPS) system suitable for vessels from approximately 40 ft to 60 ft* performance yachts with single or dual rudders.



*EH1512 Electronic Helm
Front mount 3/4 taper shaft shown
5 other options inc. 1" straight
shaft available*




* Subject to submission of survey form and rudder load calculation


- Operating temperature: -18°C to +77°C [ISO 25197]
- Storage temperature: -40°C to +85°C [ISO 25197]
- Corrosion resistance: 300 hours salt spray [ASTM B117]
- Water ingress protection: IPX7 [IEC 60529]
- Random vibration: 0.0284 g²/Hz [ABYC P-27]
- Resonant vibration: 4 G zero-peak, 20-2000 Hz [ABYC P-27]
- Mechanical shock: 50 G, 11 m-sec half-sine shape [ISO 25197]
- Ignition protection: SAEJ-1171
- Meets EN60945 electro-magnetic compatibility requirement

Issue Date - April 2019

Issue Number - 469262B

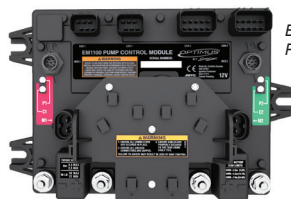

EM1200
PCM



CAN Tee's termination.



ED1X00
Color
CANtrak



EP15XX
Hydraulic
Pump

- Up to three helm stations
- Automatic battery management with sensing, warnings & best battery selection
- On demand hydraulic steering pump minimizing power consumption
- No oil at the helm
- Rugged electronics for 12 or 24 VDC applications
- Color dash display showing rudder command and rudder position graphic
- Displays system health
- Display provides system setup interface
- Communicates faults and any special handling instructions to the operator
- No requirement for tie-bars depending on rudder loads
- Simple software updating via USB port
- Programmable number of turns lock to lock with speed
- Auto-adjusting steering end stops and resistance with speed
- Dual redundant position sensing on all moving components
- Helm offers both 3/4" taper or 1" straight shaft options
- Utilizes fault tolerant CAN network
- Full autopilot CANbus connectivity and integration. No additional pumps or sensors required
- Adjustable max rudder hard over angle with speed range 25° to 40° Center to hard over
- Rudder toe in or out up to 5° with speed
- Position proportional rudder gain for faster steering response near neutral rudder position
- RPM input: NMEA 2000, J1939 or analog pulse compatible
- Pump features an integrated service/bypass valve allows a limp home mode
- Meets or exceeds ABYC, CE, ISO and SAE electrical and environmental requirements

MOUNTING CONFIGURATIONS & SYSTEM SCHEMATIC

While using the table below be sure that your steering cylinder is at mid-stroke as shown in the figure right to ensure the cylinder operates correctly.

Model EC5390 (9" Stroke)

STEERING ANGLES


50°		60°	
A	B	A	B
10.64"	7.65"	9.00"	5.79"
37,782 in-lbs*		30,515 in-lbs*	

STEERING ANGLES

70°		80°	
A	B	A	B
7.84"	4.247"	7.00"	3.36"
25,161 in-lbs*		20,996 in-lbs*	


* Torque shown is per cylinder.

Example: two cylinders at 60° steering angle will give a combined total of 61,030 in-lbs of torque.

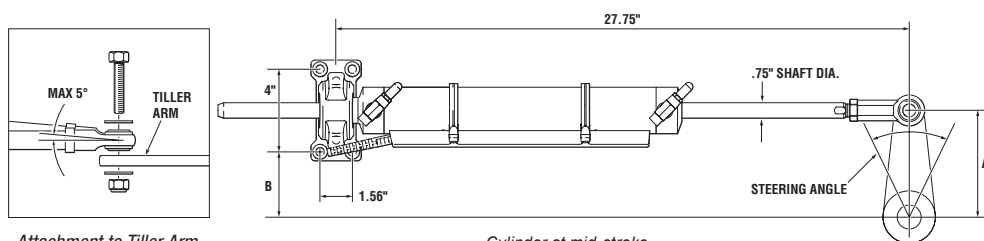

Attachment to Tiller Arm, recommended per ABYC.

Cylinder at mid-stroke.

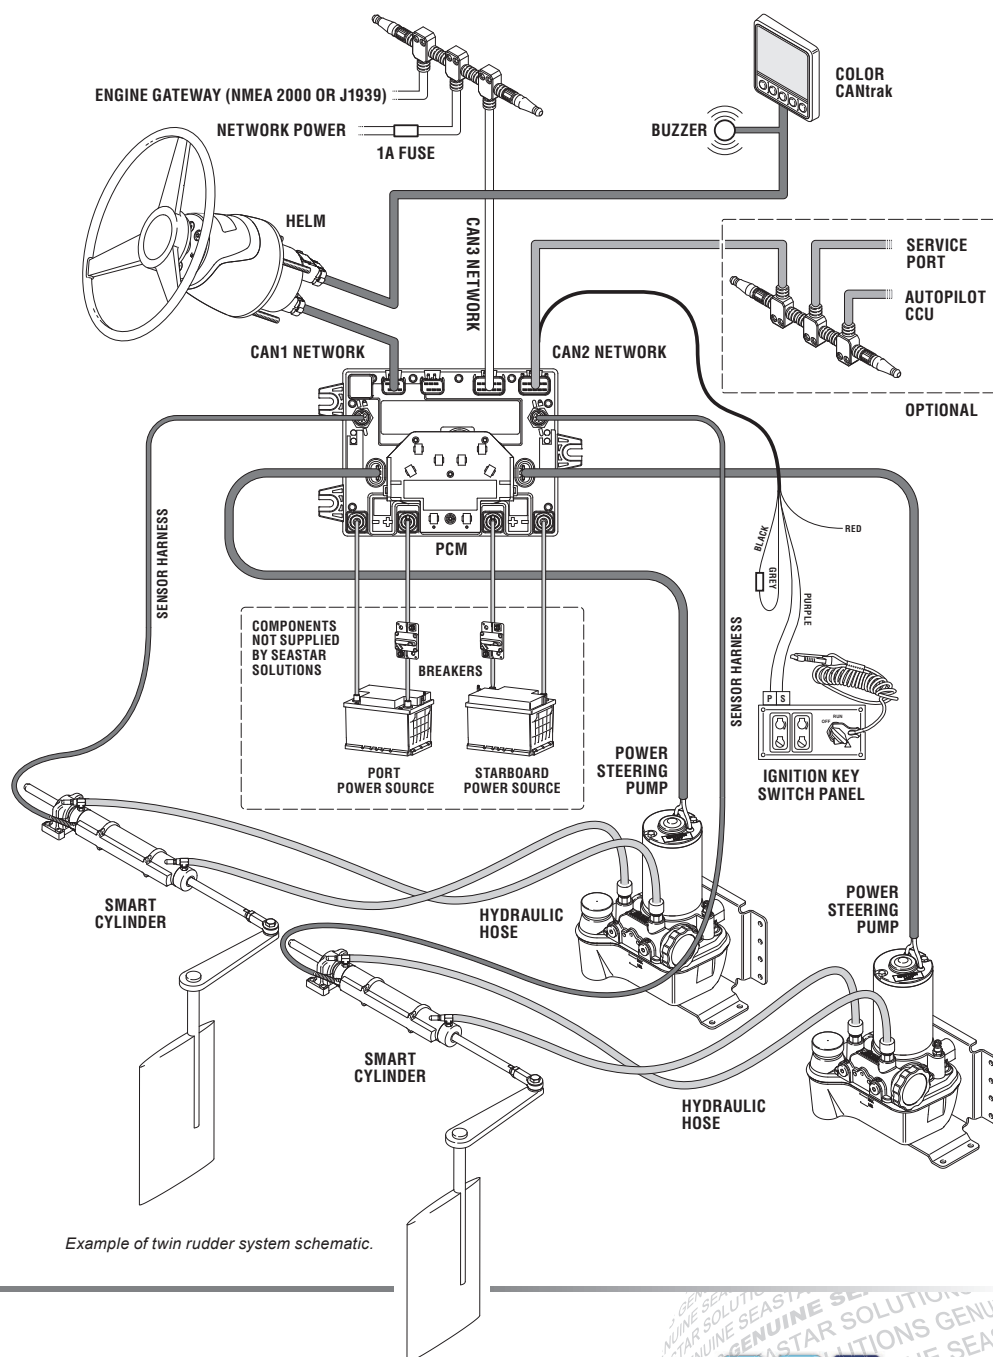

Example of twin rudder system schematic.

Issue Date - April 2019

Issue Number - 469262B