



EXOFLEX MARINE HOSE

//// FLEXIBLE • USER FRIENDLY • OZONE & ABRASION RESISTANT ///




EXOFLEX MARINE FLEXIBLE HOSE

SUITABLE FOR DELIVERY
OF COOLING WATER
AND EXHAUST GAS

EXO FLEX 254 SERIES

ID"	50' LENGTH	12 1/2' LENGTH	6 1/4' LENGTH	BEND RADIUS
3/4"	16-254-0340	16-254-0344		1 1/8"
1"	16-254-1000	16-254-1004	16-254-1001	1 1/2"
1 1/4"	16-254-1140	16-254-1144		1 7/8"
1 1/2"	16-254-1120	16-254-1124		2 1/4"
1 5/8"	16-254-1580	16-254-1584		2 7/16"
1 3/4"	16-254-1340	16-254-1344		2 5/8"
2"	16-254-2000	16-254-2004	16-254-2001	3"
2 1/4"	16-254-2140	16-254-2144	16-254-2141	3 3/8"
2 3/8"	16-254-2380	16-254-2384		3 9/16"
2 1/2"	16-254-2120	16-254-2124	16-254-2121	3 3/4"
3"	16-254-3000	16-254-3004	16-254-3001	4 1/2"
3 1/2"	16-254-3120	16-254-3124	16-254-3121	5 1/4"
4"	16-254-4000	16-254-4004	16-254-4001	6"
4 1/2"	16-254-4120	16-254-4124	16-254-4121	6 3/4"
5"		16-254-5004	16-254-5001	7 1/2"
6"	16-254-6000	16-254-6004		9"
8"		16-254-8004	16-254-8001	12"

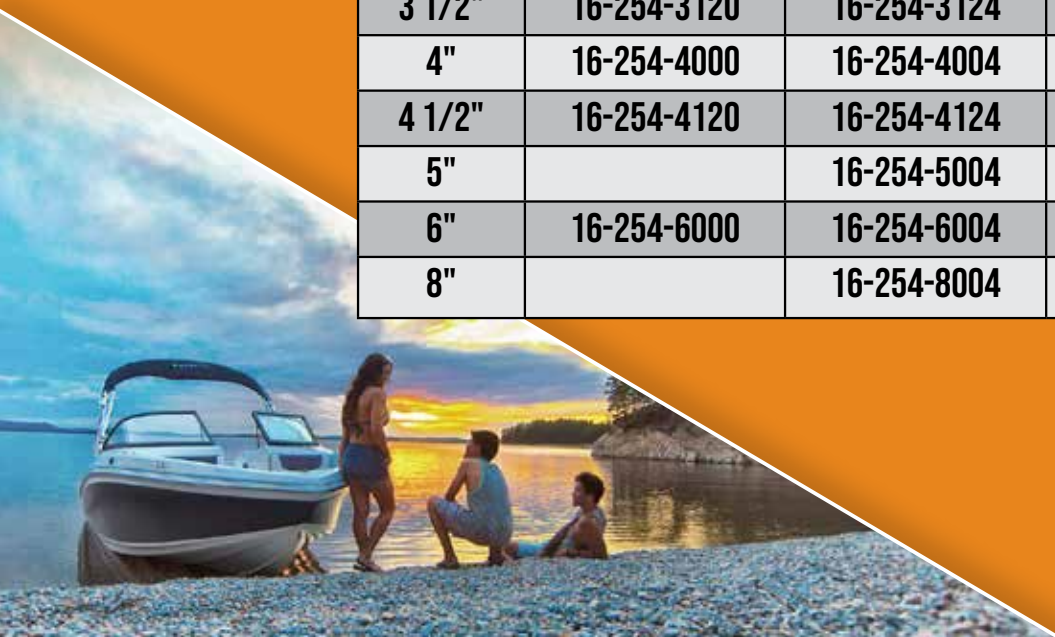

EPDM COVER, BLACK CORRUGATED
RESISTANT TO HEAT, SALT WATER,
OZONE, AND ABRASION


SYNTHETIC PLIES WITH STEEL WIRE HELICES

CORRUGATED

OZONE AND ABRASION RESISTANT
TEMPERATURE RANGE OF -22°F / 212°F, PEAKS TO 239°F

SAE J2006 R2; LLOYDS APPROVED
VERY FLEXIBLE WITH A 1.5" X ID" RADIUS

TIGHTER CORRUGATIONS TO
OPTIMIZE PERFECT CLAMP LOCATION



SHIELDS COMPLETE EPDM EXHAUST HOSE FAMILY

SHIELDS MARINE EXHAUST/WATER HOSE (NO WIRE)	200 SERIES				
	ID	50' COIL	12 1/2' LENGTH	10' LENGTH	6 1/4' LENGTH
	1/2"	16-200-0120	16-200-0124		
	5/8"	16-200-0580	16-200-0584		
	3/4"	16-200-0340	16-200-0344		
	7/8"	16-200-0780	16-200-0784		
	1"	16-200-1000	16-200-1004		16-200-1001
	1 1/8"		16-200-1184		
	1 1/4"	16-200-1140	16-200-1144		16-200-1141
	1 3/8"	16-200-1380	16-200-1384		
	1 1/2"	16-200-1120	16-200-1124		16-200-1121
	1 5/8"	16-200-1580	16-200-1584		16-200-1581
	1 3/4"	16-200-1340	16-200-1344		16-200-1341
	1 7/8"	16-200-1780	16-200-1784		16-200-1781
	2"	16-200-2000	16-200-2004		16-200-2001
	2 1/8"		16-200-2184		
	2 1/4"	16-200-2140	16-200-2144		16-200-2141
	2 3/8"	16-200-2380	16-200-2384		
	2 1/2"	16-200-2120	16-200-2124	16-200-2123	16-200-2121
	2 5/8"		16-200-2584		
	2 7/8"		16-200-2784		
	3"	16-200-3000	16-200-3004	16-200-3003	16-200-3001
	3 1/8"		16-200-3184		16-200-3181
	3 1/2"	16-200-3120	16-200-3124	16-200-3123	16-200-3121
	3 3/4"		16-200-3344		16-200-3341
	4"	16-200-4000	16-200-4004	16-200-4003	16-200-4001
	4 1/2"		16-200-4124		
	5"		16-200-5004	16-200-5003	
	6"		16-200-6004	16-200-6003	16-200-6001
	8"		16-200-8004	16-200-8003	
	10"		16-200-10004		
	12"		16-200-12004		

SHIELDSFLEX II MARINE WATER/EXHAUST HOSE (W/WIRE)	250 SERIES					
	ID	50' COIL	25' LENGTH	12 1/2' LENGTH	10' LENGTH	6 1/4' LENGTH
	1/2"	16-250-0120	16-250-0125	16-250-0124	16-250-0123	
	5/8"	16-250-0580	16-250-0585	16-250-0584	16-250-0583	
	3/4"	16-250-0340	16-250-0345	16-250-0344	16-250-0343	16-250-0341
	7/8"	16-250-0780		16-250-0784	16-250-0783	16-250-0781
	1"	16-250-1000	16-250-1005	16-250-1004	16-250-1003	16-250-1001
	1 1/8"	16-250-1180		16-250-1184	16-250-1183	
	1 1/4"	16-250-1140	16-250-1145	16-250-1144	16-250-1143	16-250-1141
	1 5/16"	16-250-1560		16-250-1564		
	1 3/8"	16-250-1380		16-250-1384	16-250-1383	
	1 1/2"	16-250-1120	16-250-1125	16-250-1124	16-250-1123	16-250-1121
	1 5/8"	16-250-1580		16-250-1584	16-250-1583	
	1 3/4"	16-250-1340		16-250-1344	16-250-1343	
	1 7/8"	16-250-1780		16-250-1784	16-250-1783	
	2"	16-250-2000		16-250-2004	16-250-2003	16-250-2001
	2 1/8"	16-250-2180		16-250-2184		
	2 1/4"	16-250-2140		16-250-2144		16-250-2141
	2 3/8"	16-250-2380		16-250-2384	16-250-2383	
	2 1/2"	16-250-2120		16-250-2124	16-250-2123	16-250-2121
	2 5/8"			16-250-2584		
	2 3/4"	16-250-2340		16-250-2344		
	2 7/8"	16-250-2780		16-250-2784	16-250-2783	16-250-2781
	3"	16-250-3000		16-250-3004	16-250-3003	16-250-3001
	3 1/8"	16-250-3180		16-250-3184		16-250-3181
	3 1/2"	16-250-3120		16-250-3124	16-250-3123	16-250-3121
	4"	16-250-4000		16-250-4004	16-250-4003	16-250-4001
	4 1/2"	16-250-4120		16-250-4124		
	5"	16-250-5000		16-250-5004		16-250-5001
	6"			16-250-6004		16-250-6001
	8"			16-250-8004		

200 Series

- Primarily used for straight connections in wet exhaust systems and engine water circulation lines.
- Resistant to engine heat, exhaust fumes, ozone, mild chemicals, antifreeze and saltwater.
- Temperature ranges from -20°F – +200°F continuous, +250°F intermittent.
- Meets SAE J2006 Type R1 standards.

250 Series


- Reinforced with wire helix embedded between plies of HD synthetic cord.
- Resistant to exhaust fumes, ozone, mild chemicals, antifreeze and saltwater.
- Primarily used for engine intake, wet exhaust connections, bilge pump intake/discharge, scupper lines, toilet intake/discharge, and holding tank vent/pump out.
- The temperature ranges from -20°F – +200°F continuous, +250°F intermittent.
- Meets SAE J2006 Type R2 standards.

252 Series

- Reinforced with double wire helix embedded between plies of synthetic cord and is abrasion resistant
- Resistant to exhaust fumes, ozone, mild chemicals, antifreeze, and saltwater.
- Primarily used for wet exhaust connections with significant bends, engine intake and scupper lines.
- The temperature ranges from -20°F to +200°F continuous, +250°F intermittent.
- This hose now has double the ozone resistance required by SAE J2006.
- Meets SAE J2006 Type R2 standards.

SHIELDSAUST-C	252 SERIES				
	ID	50' COIL	12 1/2' LENGTH	10' LENGTH	6 1/4' LENGTH
	3/4"	16-252-0340	16-252-0344		
	7/8"				
	1"	16-252-1000	16-252-1004	16-252-1003	16-252-1001
	1 1/4"	16-252-1140	16-252-1144	16-252-1143	
	1 1/2"	16-252-1120	16-252-1124	16-252-1123	
	1 5/8"	16-252-1580	16-252-1584		
	1 3/4"	16-252-1340	16-252-1344	16-252-1343	
	1 7/8"	16-252-1780	16-252-1784		16-252-1781
	2"	16-252-2000	16-252-2004	16-252-2003	16-252-2001
	2 1/8"		16-252-2184		
	2 1/4"		16-252-2144		
	2 3/8"	16-252-2380	16-252-2384		16-252-2381
	2 1/2"	16-252-2120	16-252-2124	16-252-2123	16-252-2121
	2 3/4"		16-252-2344		
	2 7/8"	16-252-2780	16-252-2784		
	3"	16-252-3000	16-252-3004	16-252-3003	16-252-3001
	3 1/8"		16-252-3184		
	3 1/2"	16-252-3120	16-252-3124	16-252-3123	16-252-3121
	4"	16-252-4000	16-252-4004	16-252-4003	16-252-4001
	4 1/8"		16-252-4184		
	4 1/2"		16-252-4124		
	5"		16-252-5004		16-252-5001
	6"	16-252-6000	16-252-6004		16-252-6001
	8"		16-252-8004		

Part No. BROCH-EXOFLEX



8 08282 38139 4

sierramarine.com

2020 Sierra All Rights Reserved
Printed in USA.

